


MAX FLAT

Water Transfer Made Easy

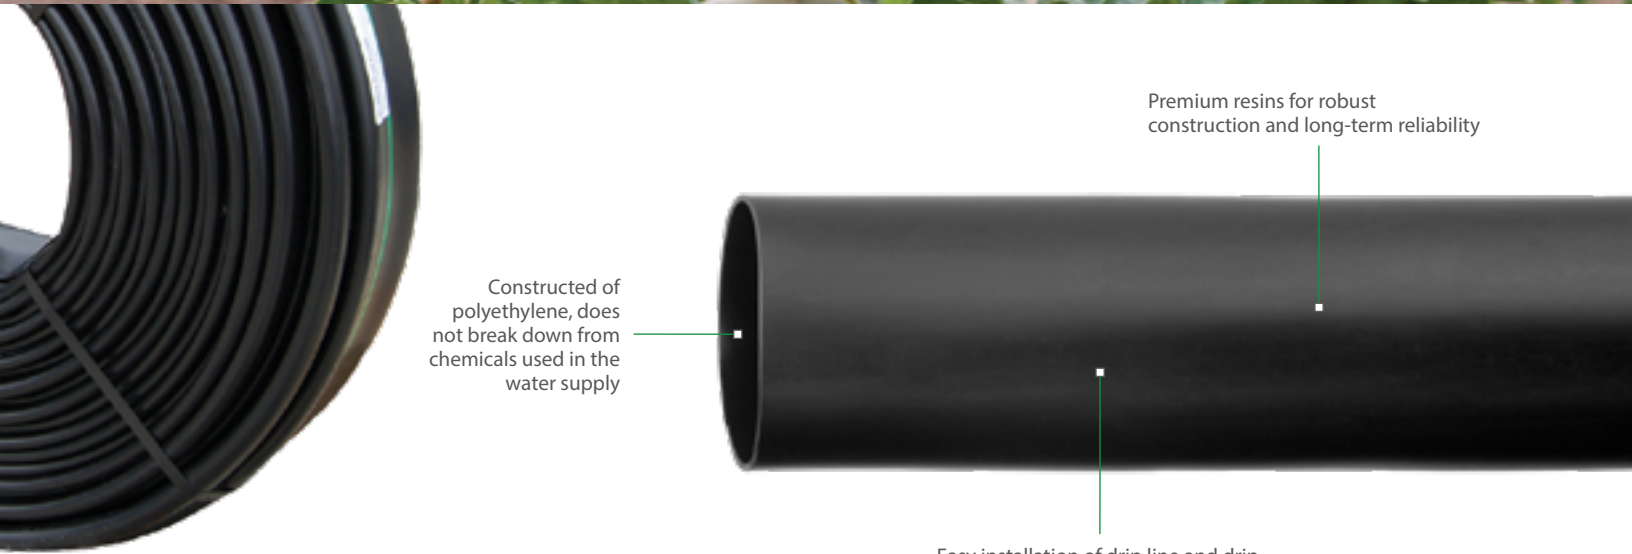

Constructed of polyethylene, does not break down from chemicals used in the water supply

Premium resins for robust construction and long-term reliability

Easy installation of drip line and drip tape fittings with just a hole-punch reduces labor costs

Available Configurations

Diameters (in)	1 1/2, 2, 3, 4
Colors	Black
Maximum Operating Pressures (psi)	21

Grower Benefits

- Can be used where fertigation or other chemicals break down/dissolve layflat products
- Fittings connect quickly and can easily use a hole-punch so it takes less time to connect

Advantages

- Versatile, durable hose made with premium resin resistant to stress, cracking and kinking
- Precision manufacturing ensures the uniformity of internal diameter and wall thickness for outstanding performance

Applications

- Transfer lines and sub-main lines for agriculture and horticulture

Product Specifications

Color	Size	ID	OD	Wall	Roll Length	Roll Weight	Number of Rolls per Pallet
	in	in	in	in	ft	Lbs	
Black	1.5	1.595	1.679	0.042	300	28	8
Black	1.5	1.595	1.679	0.042	600	55	8
Black	2	2.052	2.163	0.055	150	24	8
Black	2	2.052	2.163	0.055	450	72	8
Black	3	3.043	3.203	0.08	200	65	20
Black	4	3.996	4.208	0.106	130	74	20



Case study outcomes are for information purposes only and actual results may vary. This literature has been compiled for circulation in USA, Mexico and Canada. Descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of Rivulis products. Because some products are not available in all regions, please contact your local dealer for details. Rivulis reserves the right to change specifications and the design of all products without notice. Every effort has been used to ensure that product information, including data sheets, schematics, manuals and brochures are correct. However information should be verified before making any decisions based on this information. 051019